



SPAHR METRIC, INC.

YOUR DIRECT SOURCE FOR METRIC STEEL & FASTENERS


Metric I Beam HEM

Material Available: CARBON STEEL - S235JR / S355JO / S355J2 - EN 10025

Stainless Steel - 304, 304L, 316

Available in 3 meter and 6 meter lengths

All sizes shown may not be in stock, please call us for more information

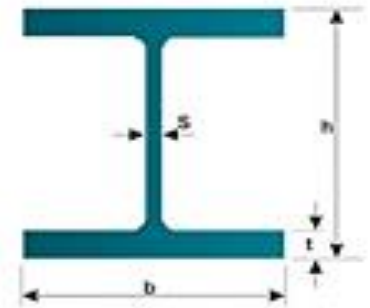

Description	Profile Size	Dimension h	Dimension b	Dimension s	Thickness t	Weight	Finish Options						Length Options	
							S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	100 mm	120 mm	106 mm	12 mm	20 mm	41.8 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	120 mm	140 mm	126 mm	12.5 mm	21 mm	52.1 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	140 mm	160 mm	146 mm	13 mm	22 mm	63.2 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	160 mm	180 mm	166 mm	14 mm	23 mm	76.2 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	180 mm	200 mm	186 mm	14.5 mm	24 mm	88.9 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	200 mm	220 mm	206 mm	15 mm	25 mm	103 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	220 mm	240 mm	226 mm	15.5 mm	26 mm	117 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	240 mm	270 mm	248 mm	18 mm	32 mm	157 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	260 mm	290 mm	268 mm	18 mm	32.5 mm	172 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	280 mm	310 mm	288 mm	18.5 mm	33 mm	189 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	300 mm	340 mm	310 mm	21 mm	39 mm	238 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	320 mm	359 mm	309 mm	21 mm	40 mm	245 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	340 mm	377 mm	309 mm	21 mm	40 mm	248 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	360 mm	395 mm	308 mm	21 mm	40 mm	250 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	400 mm	432 mm	307 mm	21 mm	40 mm	256 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	450 mm	478 mm	307 mm	21mm	40 mm	263 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	500 mm	524 mm	306 mm	21 mm	40 mm	270 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	550 mm	572 mm	306 mm	21 mm	40 mm	278 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	600 mm	620 mm	305 mm	21 mm	40 mm	285 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	650 mm	668 mm	305 mm	21 mm	40 mm	293 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	700 mm	716 mm	304 mm	21 mm	40 mm	301 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter

Metric I Beam HEM	800 mm	814 mm	303 mm	21 mm	40 mm	317 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	900 mm	910 mm	302 mm	21 mm	40 mm	333 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam HEM	1000 mm	1008 mm	302 mm	21 mm	40 mm	349 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter

Spahr Metric Inc

421 McGhee Rd

Winchester, VA 22603

Phone: 800-858-3139

Fax: 540-678-3819

web: www.spahrmetric.com

Matthew Mowery - email: mmowery@spahrmetric.com

Tiffany Perez - email: tperez@spahrmetric.com

Chantal Aeschbach - email: caeschbach@spahrmetric.com