



# SPAHR METRIC, INC.

YOUR DIRECT SOURCE FOR METRIC STEEL & FASTENERS


## Metric I Beam INP

**Material Available:** CARBON STEEL - S235JR / S355JO / S355J2 - EN 10025

**Stainless Steel** - 304, 304L, 316

Available in 3 meter and 6 meter lengths

All sizes shown may not be in stock, please call us for more information

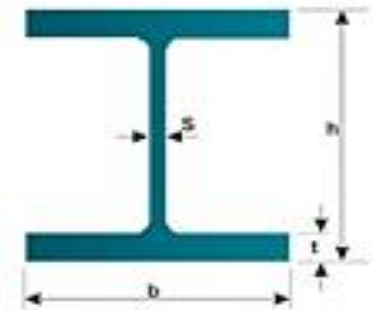

Description	Profile Size	Dimension h	Dimension b	Dimension s	Thickness t	Weight	Finish Options						Length Options	
							S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	80 mm	80 mm	42 mm	3.9 mm	5.9 mm	6 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	100 mm	100 mm	50 mm	4.5 mm	6.8 mm	8.3 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	120 mm	120 mm	58 mm	5.1 mm	7.7 mm	11.2 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	140 mm	140 mm	66 mm	5.7 mm	8.6 mm	14.3 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	160 mm	160 mm	74 mm	6.3 mm	9.5 mm	17.9 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	180 mm	180 mm	82 mm	6.9 mm	10.4 mm	21.9 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	200 mm	200 mm	90 mm	7.5 mm	11.3 mm	26.2 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	220 mm	220 mm	98 mm	8.1 mm	12.2 mm	31 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	240 mm	240 mm	106 mm	8.7 mm	13.1 mm	36.2 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	260 mm	260 mm	113 mm	9.4 mm	14.1 mm	41.8 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	280 mm	280 mm	119 mm	10.1 mm	15.2 mm	47.9 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	300 mm	300 mm	125 mm	10.8 mm	16.2 mm	54.2 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	320 mm	320 mm	131 mm	11.5 mm	17.3 mm	61 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	340 mm	340 mm	137 mm	12.2 mm	18.3 mm	68.1 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	360 mm	360 mm	143 mm	13 mm	19.5 mm	76.2 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	380 mm	380 mm	149 mm	13.7 mm	20.5 mm	84 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	400 mm	400 mm	155 mm	14.4 mm	21.6 mm	92.6 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter
Metric I Beam INP	450 mm	450 mm	170 mm	16.2 mm	24.3 mm	115.4 kg/m	S235JR	S355JO	S355J2	304	304L	316	3 meter	6 meter

Spahr Metric Inc  
421 McGhee Rd  
Winchester, VA 22603

Phone: 800-858-3139  
Fax: 540-678-3819  
web: [www.spahrmetric.com](http://www.spahrmetric.com)

Matthew Mowery - email: [mmowery@spahrmetric.com](mailto:mmowery@spahrmetric.com)  
Tiffany Perez - email: [tperez@spahrmetric.com](mailto:tperez@spahrmetric.com)  
Chantal Aeschbach - email: [caeschbach@spahrmetric.com](mailto:caeschbach@spahrmetric.com)